
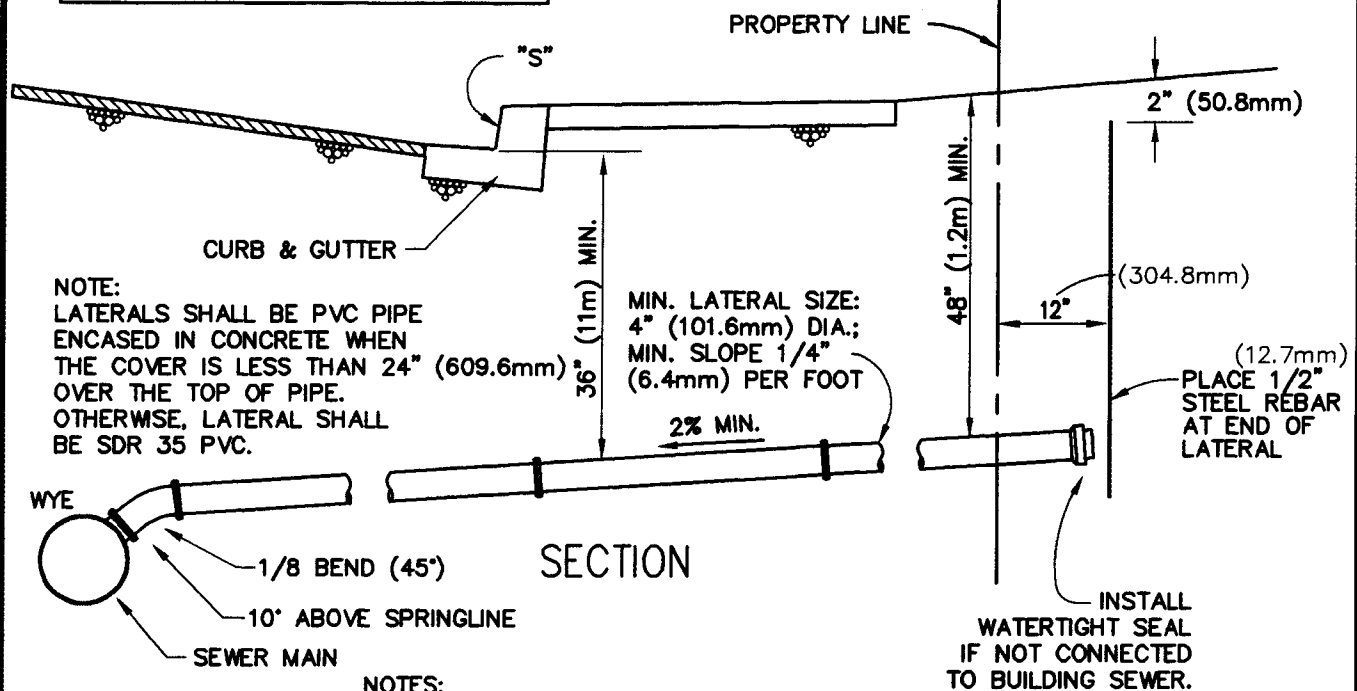


REVISIONS			
DESCRIPTIONS	BY	DATE	APPROVED

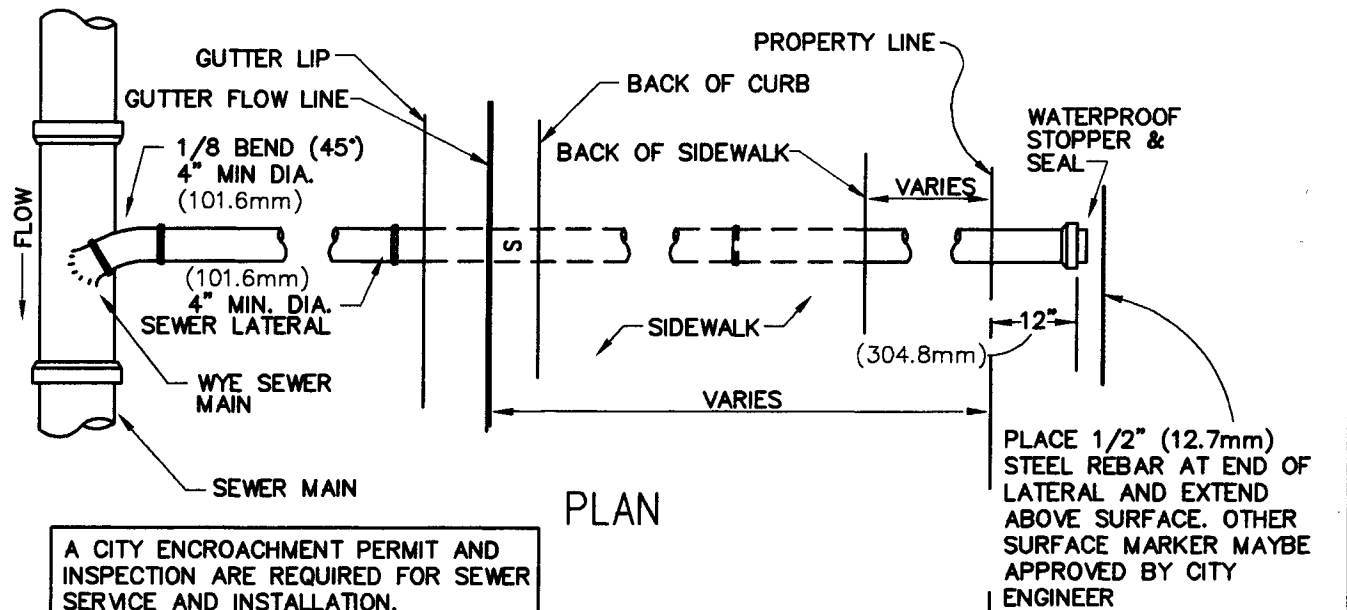

**NOTES:**

1. "S" SHALL BE MARKED ON CURB FACE OVER LATERAL.
2. THE "S" SHALL BE STAMPED INTO NEW CONCRETE AND SHALL BE CHISELED INTO EXISTING CONCRETE.
3. THE "S" SHALL BE NOT LESS THAN 3" HIGH, 2" WIDE AND 3/16" DEEP.
4. MAINTAIN MINIMUM 5' HORIZONTAL SEPARATION FROM WATER SERVICE.
5. SEWER LATERALS SHALL NOT BE LOCATED IN DRIVEWAYS UNLESS APPROVED BY THE CITY ENGINEER.
6. FOR SEWER LATERALS CONNECTING ONTO EXIST. SEWER MAIN, A SEWER SADDLE MAYBE USED AS DIRECTED BY THE CITY ENGINEER.

DRAWN BY:  
C.A.C.  
DESIGNED BY:

DATE:  
4/18/94  
FILE NAME:  
PR-F-6.DWG

CITY OF PASO ROBLES  
ENGINEERING DIVISION

**SEWER LATERAL LOCATION**

DRAWING NO.

**F-6**